



EDUCATION SYSTEMS

CAFETERIAS • CLASSROOMS • HALLWAYS • KITCHENS
LABORATORIES • LOCKER ROOMS

















SIMFLAKE SB


DECORATIVE CHIP

Our flooring solution can accent this gathering area and seamlessly transition to hallways. **SIMFLAKE SB** is a decorative system available in a wide variety of **Simiron Decorative Chip** blends. It is easy to match school colors or design plans. Texture from the broadcast provides long-lasting appearance and traction for an area that has a high amount of student traffic. Optional satin and non-skid texture is recommended for this area, which is subject to food and beverage spillage.


SYSTEM ATTRIBUTES

 ADHESION: > 400 psi	 COEFFICIENT OF FRICTION: 0.60	 COMPRESSIVE STRENGTH: 11,600 psi	 FLAMMABILITY: Self-extinguishing on concrete	 FLEXIBILITY 1/8" BEND MANDREL: PASS	 FLEXURAL STRENGTH: 12,800 psi
 HARDNESS: Pencil 4H	 GLOSS: 70 - 80	 RESISTANCE: 1x10 (6th power) - < 1x10 (9th power) ohms	 TABER ABRASION: 12 mg loss	 TENSILE STRENGTH: 9,600 psi	 UV RESISTANT

SYSTEM BUILD

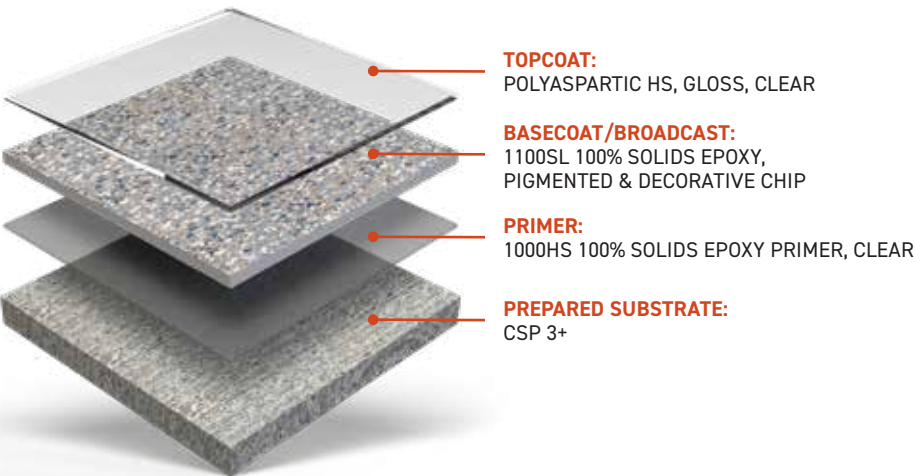

COLOR SELECTIONS



To view all color selections refer to the **Simiron Product Color Guide**.













CLASSROOMS

SIMFLOOR METALLIC


METALLIC PIGMENT

Are you ready to make a change from boring, industrial floor tiles? **SIMFLOOR METALLIC** floor system uses an exotic pigment that creates a beautiful three-dimensional appearance that gives the illusion of waves, swirls and ripples. The epoxy siloxane topcoat has a satin finish with minor texture that will hold up to constant student movement while still being easy to clean. A metallic floor creates a unique pearlescent and iridescent appearance.

SYSTEM ATTRIBUTES


 ADHESION: > 400 psi	 COEFFICIENT OF FRICTION: > .05	 COMPRESSIVE STRENGTH: > 11,600 psi	 ELONGATION: 5 - 10%	 FLAMMABILITY: Self-extinguishing on concrete	 FLEXIBILITY 1/8" BEND MANDREL: PASS
 FLEXURAL STRENGTH: > 12,800 psi	 GLOSS: 88°	 HARDNESS: Shore D: > 75	 TABER ABRASION: 40 mg loss	 TENSILE STRENGTH: 9,600 psi	 UV RESISTANT

SYSTEM BUILD

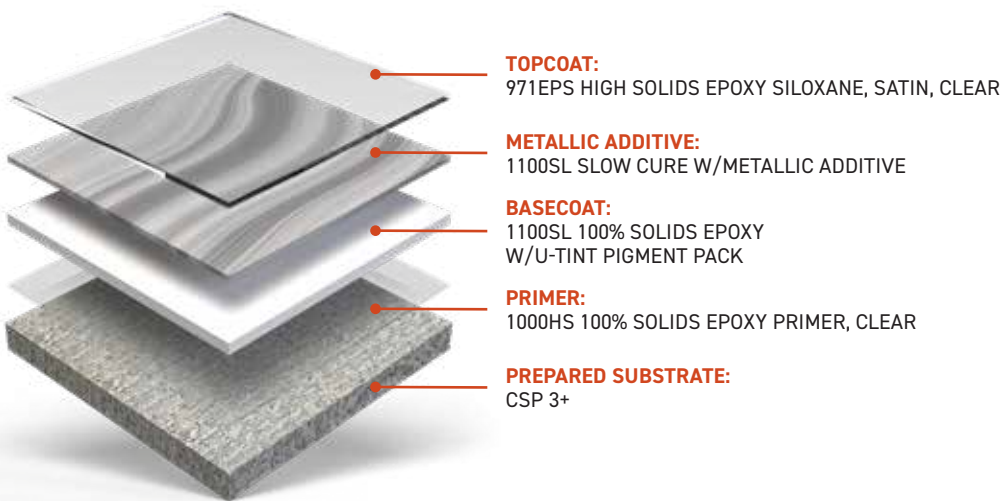

COLOR SELECTIONS

To view all color selections refer to the **Simiron Product Color Guide**.





SIMFLOOR METALLIC METALLIC PIGMENT

Are you looking for durable flooring that will match school colors or design plans? **SIMFLOOR METALLIC** is a decorative system, which has become a great accent as schools have evolved into grand spaces. Compliment lockers or walls with the many color choices of **Simiron Metallic Additive**. Subtle texture from the satin topcoat provides a long-lasting appearance and slip resistance for the high-traffic walkways that connect students to classrooms, the cafeteria and other school services.

SYSTEM ATTRIBUTES



ADHESION:
> 400 psi



**COEFFICIENT
OF FRICTION:**
> .05



**COMPRESSIVE
STRENGTH:**
> 11,600 psi



ELONGATION:
5 - 10%



FLAMMABILITY:
Self-extinguishing
on concrete



FLEXIBILITY 1/8"
BEND MANDREL:
PASS



**FLEXURAL
STRENGTH:**
> 12,800 psi



GLOSS:
88°



HARDNESS:
Shore D: > 75



**TABER
ABRASION:**
40 mg loss




**TENSILE
STRENGTH:**
9,600 psi



**UV
RESISTANT**

SYSTEM BUILD

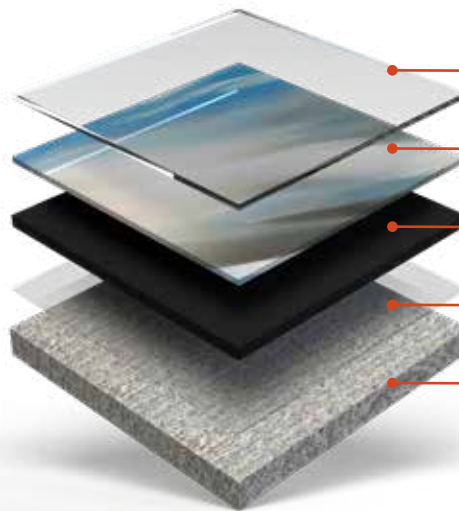

TOPCOAT:
971EPS HIGH SOLIDS EPOXY SILOXANE, SATIN

METALLIC ADDITIVE:
1100SL SLOW CURE W/METALLIC ADDITIVE

BASECOAT:
1100SL 100% SOLIDS EPOXY
W/U-TINT PIGMENT PACK

PRIMER:
1000HS 100% SOLIDS EPOXY PRIMER, CLEAR

PREPARED SUBSTRATE:
CSP 3+

COLOR SELECTIONS

To view all color selections refer to
the **Simiron Product Color Guide**.




SIMCRETE SF


URETHANE CEMENT

Cooks and kitchen workers need slip-resistant floors that are durable. **SIMCRETE SF** is a self-leveling urethane cement broadcast to rejection with silica sand to achieve a thickness of ¼". This heavy-duty system with slip-resistant texture is suited for kitchen applications. It will withstand damage from dropped cooking equipment, thermal shock from hot water cleaning and under ovens and and oil splatter. A polyaspartic is used to lock in the broadcast, which provides resistance to cleaning chemicals.


SYSTEM ATTRIBUTES




BOND STRENGTH:
100% Concrete Failure




COEFFICIENT OF FRICTION:
> 0.63




COMPRESSIVE STRENGTH:
> 8,300 psi




FLAMMABILITY:
Self-extinguishing on concrete




FLEXURAL STRENGTH:
> 2,550 psi




GLOSS:
92 - 95°




IMPACT STRENGTH:
> 160 lbs/inch




RESISTANCE TO FUNGI GROWTH:
PASS



TABER ABRASION:
30 mg loss




TENSILE STRENGTH:
> 1,000 psi




UV RESISTANT

SYSTEM BUILD

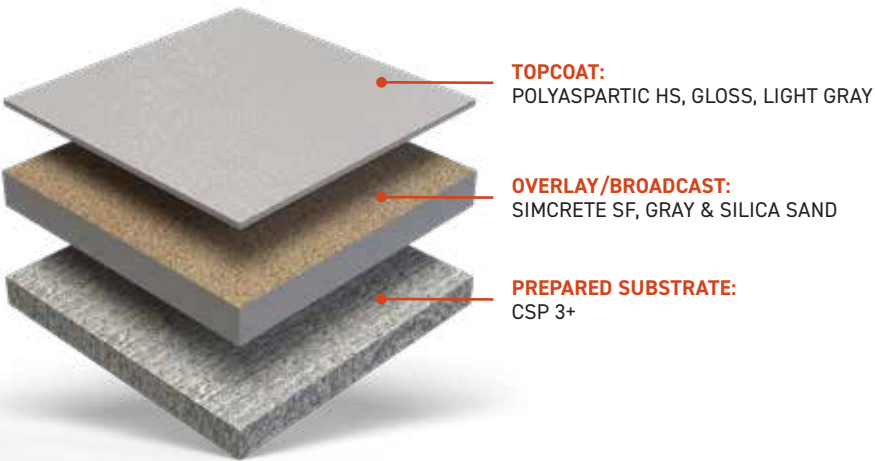

COLOR SELECTIONS

To view all color selections refer to the **Simiron Product Color Guide**.







LABORATORIES


SIMFLAKE SB DECORATIVE CHIP

STEM study environments could be enhanced by a decorative element like a floor. **SIMFLAKE SB** is a single-broadcast floor system that utilizes **Simiron Decorative Chip** to achieve easy to maintain, long-lasting results. This three-layer system offers a wide variety of blends to go with all cabinet and countertop combinations. The featured system has light texture and a gloss finish, making it easy to wipe up spills. The 60 mil system thickness provides a sound base for free-standing equipment or heavy lab tables.

SYSTEM ATTRIBUTES

 DURABLE: 30 mg loss	 ADHESION: > 400 psi	 COEFFICIENT OF FRICTION: > .55	 COMPRESSIVE STRENGTH: 11,600 psi	 ELONGATION: 5 - 10%	 FLAMMABILITY: Self-extinguishing on concrete
 FLEXIBILITY 1/8" BEND MANDREL: PASS	 FLEXURAL STRENGTH: 12,800 psi	 GLOSS: 92 - 95°	 HARDNESS: Shore D > 70, 86	 TENSILE STRENGTH: > 9,600 psi	 UV RESISTANT

SYSTEM BUILD

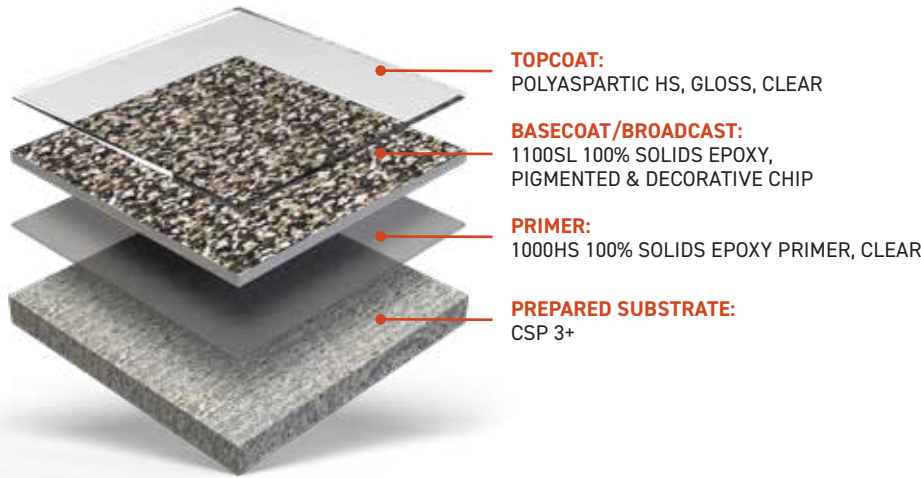

COLOR SELECTIONS














To view all color selections refer to the **Simiron Product Color Guide**.

LOCKER ROOMS


SIMQUARTZ DB DECORATIVE QUARTZ

Locker Rooms can become slippery and they need texture to minimize slip hazards. **SIMQUARTZ DB** is a double-broadcast floor system that utilizes colored quartz to achieve critical texture and a decorative look that is very durable for long-lasting results. This four-layer system consists of a primer, two quartz broadcast layers, and topcoat. We use a polyaspartic to lock in the quartz/topcoat, which provides color stability and resistance to chemicals typically used to clean bathrooms.

SYSTEM ATTRIBUTES


 ADHESION: > 400 psi	 COEFFICIENT OF FRICTION: 0.65	 ELONGATION: > 5%	 FLAMMABILITY: Self-extinguishing on concrete	 FLEXIBILITY 1/8" BEND MANDREL: PASS	 GLOSS: 92 - 95°
 HARDNESS: Shore D 70, 86	 SLIP RESISTANT	 TABER ABRASION: 30 mg loss	 TENSILE STRENGTH: 4,000 psi	 UV RESISTANT	

SYSTEM BUILD

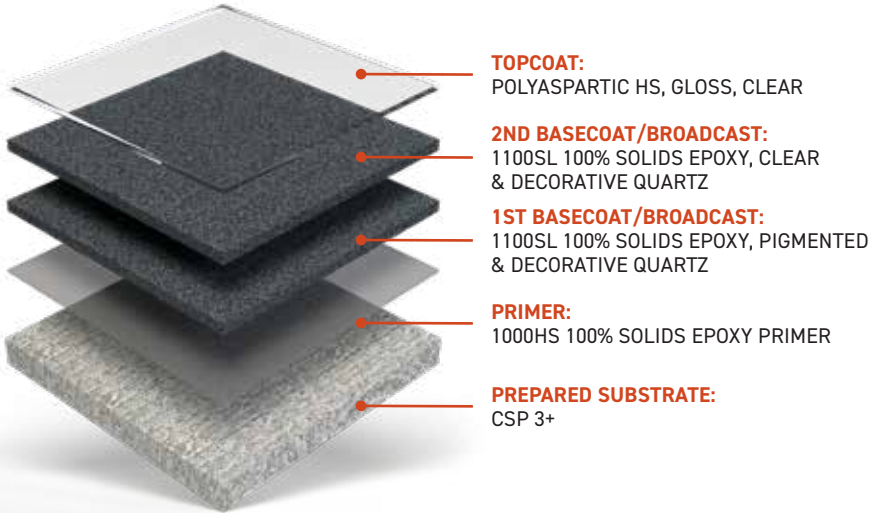

COLOR SELECTIONS

To view all color selections refer to the **Simiron Product Color Guide**.



CHEMICAL RESISTANCE CHART

SIMIRON SYSTEMS	SIMFLAKE SB EPOXY	SIMFLAKE SB POLYUREA	SIMFLOOR HB-EPOXY	SIMFLOOR HWU	SIMFLOOR ESD	SIMFLOOR EPOXY SILOXANE	SHOP FLOOR
CHEMICAL	RESULTS	RESULTS	RESULTS	RESULTS	RESULTS	RESULTS	RESULTS
10% Acetic Acid	G	G	G	F	F	E	G
Vinegar	G	G	G	G	G	G	G
10% Citric Acid	G	G	G	G	G	G	G
10% Hydrochloric Acid	G	G	G	E	E	E	G
30% Hydrochloric Acid (muriatic)	G	G	G	E	E	E	G
10% Nitric Acid	NR	NR	G*	G	G	G	NR
50% Phosphoric Acid	F	F	F	G	G	G	F
10% Sulfuric Acid	F	F	G	F	F	G	F
37% Sulfuric Acid	F	F	F	F	F	G	F
70% Sulfuric Acid	F	F	F	F	F	G*	F
20% Ammonium Nitrate	E	E	E	E	E	E	E
20% Sodium Chloride	E	E	E	E	E	E	E
50% Sodium Hydroxide	G	G	E	E	E	E	G
Methyl Ethyl Ketone	E	E	G	E	E	E	E
Xylene	E	E	F	E	E	E	E
Ethylene Glycol	E	E	G	E	E	E	E
Isopropyl Alcohol	E	E	F	E	E	E	E
Mineral Spirits	F	F	E	E	E	E	F
Brake Fluid	E	E	F	G	G	G	E
Transmission Fluid	E	E	E	E	E	E	E
Motor Oil	E	E	E	E	E	E	E
50:1 Gas/Oil Mixture	E	E	E	E	E	E	E
E85 Gasoline	E	E	E	E	E	E	E
E95 Gasoline	E	E	E	E	E	E	E
Unleaded Gasoline	E	E	G	E	E	E	E
Skydrol	E	E	E	E	E	E	E
Betadine	E	E	G*	G*	G*	G*	E
Bleach	E	E	E	E	E	E	E
Urine	E	E	E	E	E	E	E
Coffee	E	E	E	E	E	E	E
Cola	E	E	E	E	E	E	E
Ketchup	E	E	G	F	F	E	E
Mustard	G*	G*	G	G	G	G*	G*
Red Wine	E	E	E	E	E	E	E

*Stain is only defect.

SIMIRON SYSTEMS	SIMCRETE SL	SIMCRETE SL FLAKE	SIMCRETE SL QUARTZ	SIMQUARTZ DB	SIMCRETE SL+TC	SIMFLOOR METALLIC
CHEMICAL	RESULTS	RESULTS	RESULTS	RESULTS	RESULTS	RESULTS
10% Acetic Acid	G	G	G	F	E	E
Vinegar	G	G	G	F	E	G
10% Citric Acid	G	G	G	E	E	G
10% Hydrochloric Acid	G	G	G	E	E	E
30% Hydrochloric Acid (muriatic)	G	G	G	E	E	E
10% Nitric Acid	NR	NR	NR	NR	G	G
50% Phosphoric Acid	F	F	F	NR	G	G
10% Sulfuric Acid	F	F	F	E	G	G
37% Sulfuric Acid	F	F	F	G	F	G
70% Sulfuric Acid	F	F	F	NR	NR	G*
20% Ammonium Nitrate	E	E	E	E	E	E
20% Sodium Chloride	E	E	E	E	E	E
50% Sodium Hydroxide	G	G	G	G	E	E
Methyl Ethyl Ketone	E	E	E	E	F	E
Xylene	E	E	E	E	E	E
Ethylene Glycol	E	E	E	E	E	E
Isopropyl Alcohol	E	E	E	E	E	E
Mineral Spirits	F	F	F	E	E	E
Brake Fluid	E	E	E	G	E	G
Transmission Fluid	E	E	E	E	E	E
Motor Oil	E	E	E	E	E	E
50:1 Gas/Oil Mixture	E	E	E	E	E	E
E85 Gasoline	E	E	E	E	E	E
E95 Gasoline	E	E	E	E	E	E
Unleaded Gasoline	E	E	E	E	E	E
Skydrol	E	E	E	E	E	E
Betadine	E	E	E	G*	E	G*
Bleach	E	E	E	E	E	E
Urine	E	E	E	E	E	E
Coffee	E	E	E	E	E	E
Cola	E	E	E	E	E	E
Ketchup	E	E	E	F	E	E
Mustard	G*	G*	G*	G	E	G*
Red Wine	E	E	E	E	E	E

*Stain is only defect.

KEY

E = Excellent

G = Good

F = Fair

NR = Not Recommend



SIMIRON.COM | SHOP.SIMIRON.COM



SIMIRON INC.
CORPORATE HEADQUARTERS
3000 Research Drive
Rochester Hills, MI 48309
(248) 686-3600

MADE IN THE USA

